





**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA



Indoor unit E\*PT17/20X-\*\*\*\*D(W)  
Outdoor unit PUZ-WM50VHA(-BS)

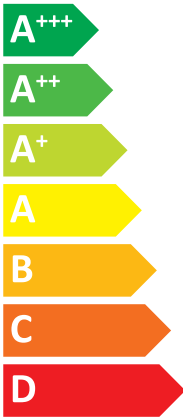

**A++**



**A+**



40 dB  
61 dB



- 04 kW
- 05 kW
- 05 kW

2019

811/2013

BH79V003H60



## Mitsubishi Electric ERP Directive Related Product Information: erp.mitsubishielectric.eu/erp

		For medium-temperature application.												For low-temperature application.																																	
Outdoor unit	Indoor unit	Medium-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions kW	For space heating, annual energy consumption under average climate conditions kWh	For water heating, annual electricity consumption under average climate conditions kWh	Seasonal space heating energy efficiency under average climate conditions %	Water heating energy efficiency under average climate conditions %	Sound power level L <sub>WA</sub> indoor dB	Work only during off-peak hours	Rated heat output under colder climate conditions kW	Rated heat output under warmer climate conditions kW	For space heating, annual energy consumption under colder climate conditions kWh	For space heating, annual energy consumption under warmer climate conditions kWh	For water heating, annual energy consumption under colder climate conditions kWh	For water heating, annual energy consumption under warmer climate conditions kWh	Seasonal space heating energy efficiency under colder climate conditions %	Seasonal space heating energy efficiency under warmer climate conditions %	Water heating energy efficiency under colder climate conditions %	Water heating energy efficiency under warmer climate conditions %	Sound power level L <sub>WA</sub> outdoor dB	Low-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions kW	For space heating, annual energy consumption under average climate conditions kWh	For water heating, annual electricity consumption under average climate conditions kWh	Seasonal space heating energy efficiency under average climate conditions %	Water heating energy efficiency under average climate conditions %	Sound power level L <sub>WA</sub> indoor dB	Work only during off-peak hours	Rated heat output under colder climate conditions kW	Rated heat output under warmer climate conditions kW	For space heating, annual energy consumption under colder climate conditions kWh	For space heating, annual energy consumption under warmer climate conditions kWh	For water heating, annual energy consumption under colder climate conditions kWh	For water heating, annual energy consumption under warmer climate conditions kWh	Seasonal space heating energy efficiency under colder climate conditions %	Seasonal space heating energy efficiency under warmer climate conditions %	Water heating energy efficiency under colder climate conditions %	Water heating energy efficiency under warmer climate conditions %	Sound power level L <sub>WA</sub> outdoor dB				
																																												1	2	3	4
PUZ-WM65V(AA)-(BS)	EHPT17X-****D	Medium-temperature application	A++	A+	5.0	3014	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Seasonal space heating energy efficiency class	A++	A+	5.0	3014	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Water heating energy efficiency class	A+	A+	5.0	3014	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Rated heat output under average climate conditions	5.0	5.0	3014	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		For space heating, annual energy consumption under average climate conditions	3014	3014	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		For water heating, annual electricity consumption under average climate conditions	902	902	129	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Seasonal space heating energy efficiency under average climate conditions	129	120	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Water heating energy efficiency under average climate conditions	120	120	120	120	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Sound power level L <sub>WA</sub> indoor	40	40	40	40	40	-	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61			
		Work only during off-peak hours	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61		
		Rated heat output under colder climate conditions	3.1	3.1	3.1	3.1	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61		
		Rated heat output under warmer climate conditions	5.0	5.0	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61		
For space heating, annual energy consumption under colder climate conditions	2760	1616	1065	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
For space heating, annual energy consumption under warmer climate conditions	1616	1065	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
For water heating, annual energy consumption under colder climate conditions	1065	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
For water heating, annual energy consumption under warmer climate conditions	805	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
Seasonal space heating energy efficiency under colder climate conditions	107	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
Seasonal space heating energy efficiency under warmer climate conditions	157	101	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
Water heating energy efficiency under colder climate conditions	135	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
Water heating energy efficiency under warmer climate conditions	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				
Sound power level L <sub>WA</sub> outdoor	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	61	A+++	A+	5.0	2113	902	183	120	120	40	4.2	5.0	2713	1111	1065	805	141	226	101	135	61				

	English	Deutsch	Français	Italiano	Español
	Nederlands	Svenska	Български	Português	Ελληνικά
	suomi	Cestina	Български	Polski	-
	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
1	builtenunit	Utomskanhet	Устройство	unidade exterior	Εξωτερική μονάδα
	Ulkoyksikko	Venkovni jednotka	Устройство	unidade exterior	-
2	indoor unit	Indoorgerät	unité intérieure	unità interna	unidad interior
	Indoor unit	Innenhaushalt	Indoorgerät	unidade interior	Εσωτερική μονάδα
	Sisäyksikko	Vnitřní jednotka	Внутреннее устройство	unidade interior	-
	Medium-temperature application	Mitteltemperaturumgebung	Гарантиция в умеренной температуре	la aplicación a media temperatura	la aplicación de media temperatura
3	moderate-temperature application	moderate-temperature application	moderate-temperature application	a aplicação a média temperatura	η εφαρμογή σε μέση θερμοκρασία
	Kesäilmasto- ja talvetoiminta	Siedetemperaturan sovellus	Среднетемпературное применение	zaostrowanie w średnich temperaturach	-
	Low-temperature application	Nedertemperaturanvändning	Гарантия в низкой температуре	a aplicação a baixa temperatura	la aplicación de baja temperatura
4	low-temperature application	lagtemperaturtillämpning	lagtemperaturtillämpning	a aplicação a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	maailmanklassin sovellus	maailmanklassin sovellus	низкотемпературное применение	zastosowanie w niskich temperaturach	-
5	de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου
	Ilmailmanklassen kaustilainen energiatalokkuusluokka	Ilmailmanklassen kaustilainen energiatalokkuusluokka	класс энергетической эффективности для отопления помещений	A classe de eficiência energética do aquecimento ambiente sazonal	-
	Water heating energy efficiency class	Water heating energy efficiency class	класс энергетической эффективности для отопления помещений	A classe de eficiência energética do aquecimento de água	la classe de eficiencia energética del calentamiento de agua
6	de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	класс энергетической эффективности для отопления помещений	A classe de eficiência energética do aquecimento de água	la classe de eficiencia energética del calentamiento de agua
	vedenlämmityksen energiatalokkuusluokka	vedenlämmityksen energiatalokkuusluokka	класс энергетической эффективности для отопления помещений	A classe de eficiência energética do aquecimento de água	la classe de eficiencia energética del calentamiento de agua
	Rafid heat output under average climate conditions	de normale waarmede/afgevoerde klimaatomstandigheden	den normale värmeeffekt/utgående värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza massima nominale (in condizioni climatiche medie)	A potência máxima nominal (em condições climáticas médias)
7	de normale waarmede/afgevoerde klimaatomstandigheden	de normale waarmede/afgevoerde klimaatomstandigheden	den normale värmeeffekt/utgående värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza massima nominale (in condizioni climatiche medie)	A potência máxima nominal (em condições climáticas médias)
	Ilmailmanklassen kaustilainen energiatalokkuusluokka	Ilmailmanklassen kaustilainen energiatalokkuusluokka	класс энергетической эффективности для отопления помещений	zastosowanie w niskich temperaturach	-
8	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	for indoor heating, the annual energy consumption (under average climate conditions)	para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)	para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)
	Ilmailmanklassista vuotuinen energiantuotto (keskimääräisissä ilmastotilastoissa)	Ilmailmanklassista vuotuinen energiantuotto (keskimääräisissä ilmastotilastoissa)	pro výkon – roční spotřeba elektrické energie za průměrných klimatických podmínek	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
	For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	for die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	per il riscaldamento dell'acqua, il consumo annuo di energia (in condizioni climatiche medie)	per il riscaldamento dell'acqua, il consumo annuo di energia (in condizioni climatiche medie)
9	de energie-efficiëntieklasse voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntieklasse voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	za podgrzevanje na voda, godišnjega potrošnje (u prosječnim klimatskim uvjetima)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
	Ilmailmanklassista vuotuinen sähkökulutus (keskimääräisissä ilmastotilastoissa)	Ilmailmanklassista vuotuinen sähkökulutus (keskimääräisissä ilmastotilastoissa)	for indoor heating, the annual electricity consumption (under average climate conditions)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
10	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux (dans les conditions climatiques moyennes)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
	Ilmailmanklassen kaustilainen energiatalokkuusluokka (keskimääräisissä ilmastotilastoissa)	Ilmailmanklassen kaustilainen energiatalokkuusluokka (keskimääräisissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в средних климатических условиях)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
11	Water heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	la classe d'efficacité énergétique pour le chauffage de l'eau (dans les conditions climatiques moyennes)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	класс энергетической эффективности для отопления помещений (в средних климатических условиях)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
	vedenlämmityksen energiatalokkuusluokka (keskimääräisissä ilmastotilastoissa)	vedenlämmityksen energiatalokkuusluokka (keskimääräisissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в средних климатических условиях)	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	para o aquecimento de água, o consumo anual de electricidade em condições climáticas médias
12	Sound power level L <sub>WA</sub> , indoor	het geluidstermopotentiaal L <sub>WA</sub> binnen	уровень звуковой мощности L <sub>WA</sub> в помещении	O nível de potência sonora L <sub>WA</sub> em interiores	el nivel de potencia acústica L <sub>WA</sub> en interiores
	ääniteho L <sub>WA</sub> , sisällä	ääniteho L <sub>WA</sub> , sisällä	ниveau на звукова мощност L <sub>WA</sub> на закрито	razon mogo akustičnega L <sub>WA</sub> v prometu	razon mogo akustičnega L <sub>WA</sub> v prometu
	Werk omring of-peak hours	Werken urenring in de daluren	fonctionnement durant les heures de faible demande	funcionamento durante as horas de baixa demanda	funcionamento durante as horas de baixa demanda
13	hoimaajan aikataulun mukainen kuulumattomuus	hoimaajan aikataulun mukainen kuulumattomuus	travail en dehors des heures normales de fonctionnement	trabalho fora das horas normais de funcionamento	trabalho fora das horas normais de funcionamento
	Rafid heat output under colder climate conditions	Rafid heat output under colder climate conditions	la puissance thermique nominale, dans les conditions climatiques plus froides	A potência máxima nominal (em condições climáticas mais frias)	la potencia máxima nominal (em condições climáticas mais frias)
14	de normale waarmede/afgevoerde klimaatomstandigheden	de normale waarmede/afgevoerde klimaatomstandigheden	den normale värmeeffekt/utgående värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza massima nominale (in condizioni climatiche medie)	la potencia máxima nominal (in condizioni climatiche medie)
	Ilmailmanklassista vuotuinen sähkökulutus	Ilmailmanklassista vuotuinen sähkökulutus	класс энергетической эффективности для отопления помещений	zastosowanie w niskich temperaturach	-
15	Rafid heat output under warmer climate conditions	Rafid heat output under warmer climate conditions	la puissance thermique nominale, dans les conditions climatiques plus chaudes	A potência máxima nominal (em condições climáticas mais quentes)	la potencia máxima nominal (em condições climáticas mais quentes)
	de normale waarmede/afgevoerde klimaatomstandigheden	de normale waarmede/afgevoerde klimaatomstandigheden	den normale värmeeffekt/utgående värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza massima nominale (in condizioni climatiche medie)	la potencia máxima nominal (in condizioni climatiche medie)
16	voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	for indoor heating, the annual energy consumption (under cold climate conditions)	para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias
	Ilmailmanklassista vuotuinen energiantuotto (kylmissä ilmastotilastoissa)	Ilmailmanklassista vuotuinen energiantuotto (kylmissä ilmastotilastoissa)	pro výkon – roční spotřeba energie za chladnějších klimatických podmínek	para o aquecimento de água, o consumo anual de energia, em condições climáticas mais frias	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias
	For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	for die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde
17	voor ruimteverwarming, het jaarlijkse energieverbruik (onder warme klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder warme klimaatomstandigheden)	za opogrevanje, godišnjega potrošnje na energiju pri po-topli klimatskim uvjetima	para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes
	Ilmailmanklassista vuotuinen energiantuotto (lämpimissä ilmastotilastoissa)	Ilmailmanklassista vuotuinen energiantuotto (lämpimissä ilmastotilastoissa)	pro výkon – roční spotřeba energie za teplejších klimatických podmínek	para o aquecimento de água, o consumo anual de energia, em condições climáticas mais quentes	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes
	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under colder climate conditions	for die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias
18	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	for indoor heating, the annual electricity consumption (under cold climate conditions)	para o aquecimento de água, o consumo anual de energia em condições climáticas mais frias	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias
	vedenlämmityksessä vuotuinen sähkökulutus (kylmissä ilmastotilastoissa)	vedenlämmityksessä vuotuinen sähkökulutus (kylmissä ilmastotilastoissa)	pro výkon vody – roční spotřeba elektrické energie za chladnějších klimatických podmínek	para o aquecimento de água, o consumo anual de energia em condições climáticas mais frias	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias
	For water heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	for die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes
19	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder warme klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder warme klimaatomstandigheden)	za opogrevanje na voda, godišnjega potrošnje na energiju pri po-topli klimatskim uvjetima	para o aquecimento de água, o consumo anual de energia em condições climáticas mais quentes	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes
	vedenlämmityksessä vuotuinen sähkökulutus (lämpimissä ilmastotilastoissa)	vedenlämmityksessä vuotuinen sähkökulutus (lämpimissä ilmastotilastoissa)	pro výkon vody – roční spotřeba elektrické energie za teplejších klimatických podmínek	para o aquecimento de água, o consumo anual de energia em condições climáticas mais quentes	para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes
	Seasonal space heating energy efficiency under cold climate conditions	Seasonal space heating energy efficiency under cold climate conditions	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides	A classe de eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες
20	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides	A classe de eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες
	Ilmailmanklassen kaustilainen energiatalokkuus (kylmissä ilmastotilastoissa)	Ilmailmanklassen kaustilainen energiatalokkuus (kylmissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в холодных климатических условиях)	zastosowanie w niskich temperaturach	-
	Seasonal space heating energy efficiency under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes	A classe de eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
21	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder warme klimaatomstandigheden)	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming (onder warme klimaatomstandigheden)	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes	A classe de eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
	Ilmailmanklassen kaustilainen energiatalokkuus (lämpimissä ilmastotilastoissa)	Ilmailmanklassen kaustilainen energiatalokkuus (lämpimissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в теплых климатических условиях)	zastosowanie w wysokich temperaturach	-
	Seasonal space heating energy efficiency under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques moyennes	A classe de eficiência energética do aquecimento ambiente sazonal em condições climáticas médias	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό μέτριες κλιματικές συνθήκες
22	de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	la classe d'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides	A classe de eficiência energética do aquecimento de água em condições climáticas mais frias	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες
	vedenlämmityksen energiatalokkuus (kylmissä ilmastotilastoissa)	vedenlämmityksen energiatalokkuus (kylmissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в холодных климатических условиях)	zastosowanie w niskich temperaturach	-
	Water heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	la classe d'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	A classe de eficiência energética do aquecimento de água em condições climáticas mais quentes	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
23	de energie-efficiëntie voor waterverwarming (onder warme klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder warme klimaatomstandigheden)	la classe d'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	A classe de eficiência energética do aquecimento de água em condições climáticas mais quentes	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες
	vedenlämmityksen energiatalokkuus (lämpimissä ilmastotilastoissa)	vedenlämmityksen energiatalokkuus (lämpimissä ilmastotilastoissa)	класс энергетической эффективности для отопления помещений (в теплых климатических условиях)	zastosowanie w wysokich temperaturach	-
	Sound power level L <sub>WA</sub> , outdoor	het geluidstermopotentiaal L <sub>WA</sub> buiten	уровень звуковой мощности L <sub>WA</sub> на открытом воздухе	O nível de potência sonora L <sub>WA</sub> em exteriores	el nivel de potencia acústica L <sub>WA</sub> en exteriores
24	ääniteho L <sub>WA</sub> , ulkona	ääniteho L <sub>WA</sub> , ulkona	ниveau на звукова мощност L <sub>WA</sub> на открито	O nível de potência sonora L <sub>WA</sub> em exteriores	el nivel de potencia acústica L <sub>WA</sub> en exteriores

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.04	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.29	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.47	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.04	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	3014	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kWh
Annual electricity consumption	AEC	902	kWh
Water heating energy efficiency	$\eta_{wh}$	120	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	183	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.55	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.92	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.17	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2113	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kWh
Annual electricity consumption	AEC	902	kWh
Water heating energy efficiency	$\eta_{wh}$	120	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	3.1	kW	Seasonal space heating energy efficiency	$\eta_s$	107	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.36	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.41	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.93	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2760	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		$\eta_{wh}$	101	%	
Daily electricity consumption	Q <sub>elec</sub>	4.800	kW/h				
Annual electricity consumption	AEC	1065	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.2	kW	Seasonal space heating energy efficiency	$\eta_s$	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.71	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.26	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	4.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2713	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	101	%	
Daily electricity consumption	Q <sub>elec</sub>	4.800	kW/h				
Annual electricity consumption	AEC	1065	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.98	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1616	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	805	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	226	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.68	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.68	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1111	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	805	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.04	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.29	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.47	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.04	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	3014	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kWh
Annual electricity consumption	AEC	803	kWh
Water heating energy efficiency	$\eta_{wh}$	135	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	183	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.55	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.92	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.17	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2113	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	803	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	3.1	kW	Seasonal space heating energy efficiency	$\eta_s$	107	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.36	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.41	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.93	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2760	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kWh
Annual electricity consumption	AEC	934	kWh
Water heating energy efficiency	$\eta_{wh}$	116	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P<sub>designh</sub>, and the rated heat output of a supplementary heater P<sub>sup</sub> is equal to the supplementary capacity for heating sup(T<sub>j</sub>).

(\*\*) If C<sub>dh</sub> is not determined by measurement then the default degradation coefficient is C<sub>dh</sub> = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.2	kW	Seasonal space heating energy efficiency	$\eta_s$	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	2.7	kW	Tj = - 7 °C	COPd	3.25	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = + 2 °C	Pdh	2.5	kW	Tj = + 2 °C	COPd	4.24	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = + 7 °C	Pdh	1.6	kW	Tj = + 7 °C	COPd	5.71	-
Degradation co-efficient (**)	Cdh	0.94	-				
Tj = +12 °C	Pdh	1.9	kW	Tj = +12 °C	COPd	8.26	-
Degradation co-efficient (**)	Cdh	0.93	-				
Tj = bivalent temperature	Pdh	4.0	kW	Tj = bivalent temperature	COPd	2.27	-
Tj = operation limit temperature	Pdh	4.0	kW	Tj = operation limit temperature	COPd	2.27	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	4.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2713	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kWh
Annual electricity consumption	AEC	934	kWh
Water heating energy efficiency	$\eta_{wh}$	116	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.98	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	1616	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.200	kWh
Annual electricity consumption	AEC	709	kWh
Water heating energy efficiency	$\eta_{wh}$	154	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	226	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.68	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.68	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1111	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	154	%	
Daily electricity consumption	Q <sub>elec</sub>	3.200	kW/h				
Annual electricity consumption	AEC	709	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.04	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.29	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.47	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.04	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3014	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	120	%	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	902	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	190	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.55	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.92	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.17	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2113	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	120	%	
Daily electricity consumption	Q <sub>elec</sub>	4.100	kW/h				
Annual electricity consumption	AEC	902	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	3.1	kW	Seasonal space heating energy efficiency	$\eta_s$	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.36	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.41	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.93	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2760	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	101	%	
Daily electricity consumption	Q <sub>elec</sub>	4.800	kW/h				
Annual electricity consumption	AEC	1065	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.2	kW	Seasonal space heating energy efficiency	$\eta_s$	146	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.71	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.26	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	4.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2713	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	101	%	
Daily electricity consumption	Q <sub>elec</sub>	4.800	kW/h				
Annual electricity consumption	AEC	1065	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	162	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.98	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1616	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	805	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT17X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	237	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.68	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.68	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1111	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	805	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.04	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.29	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.7	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.47	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.96	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.04	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3014	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	135	%	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kW/h				
Annual electricity consumption	AEC	803	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	190	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.17	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.55	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.57	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.92	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.17	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.75	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.8	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2113	kWh
Rated air flow rate, outdoors		2140	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.700	kWh
Annual electricity consumption	AEC	803	kWh
Water heating energy efficiency	$\eta_{wh}$	135	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	3.1	kW	Seasonal space heating energy efficiency	$\eta_s$	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.36	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.42	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.5	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.41	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.93	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.50	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	3.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2760	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	116	%	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	934	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	4.2	kW	Seasonal space heating energy efficiency	$\eta_s$	146	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	2.7	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	2.5	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.24	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	1.6	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.71	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.94	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	8.26	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	2.27	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	4.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2713	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	116	%	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	934	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	162	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.98	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.8	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.95	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.98	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1616	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	154	%	
Daily electricity consumption	Q <sub>elec</sub>	3.200	kW/h				
Annual electricity consumption	AEC	709	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM50VHA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	5.0	kW	Seasonal space heating energy efficiency	$\eta_s$	237	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.68	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	1.9	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.92	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.93	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	5.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.68	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	3.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.66	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.015	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.015	kW				
Standby mode	P <sub>SB</sub>	0.015	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2140	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/61	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	1111	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	154	%	
Daily electricity consumption	Q <sub>elec</sub>	3.200	kW/h				
Annual electricity consumption	AEC	709	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.