





**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA



Indoor unit E\*PT20X-\*\*\*\*D(W)  
Outdoor unit PUZ-WM112YAA(-BS)

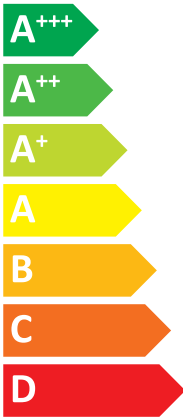

**A++**



**A+**



40 dB

60 dB



- 07 kW
- 10 kW
- 10 kW

2019

811/2013

BH79V003H19





	English	Deutsch	Français	Italiano	Español
	Nederlands	Svenska	Български	Português	Ελληνικά
	suomi	Cestina	Български	Polski	-
	Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
1	builtenunit	Utomskanhet	Устройство	unidade exterior	Εξωτερική μονάδα
	Ulkoyksikko	Verkojuo-putoika	Устройство тепло	jednostka zewnętrzna	-
	indoor unit	inleilmergät	unité intérieure	unità interna	unidad interior
2	biinennyt	Innhusenhet	Innere Einheit	unidade interior	Εσωτερική μονάδα
	Sisäyksikko	Vahvitiin jatkoka	Внутреннее устройство	jednostka wewnętrzna	-
	Mediun-temperatuurtoepassing	Miltitemperatuurtoepassing	Гарантиция а подемне температура	la aplicación a media temperatura	la aplicación de media temperatura
3	inden-temperatuurtoepassing	meduun-temperatuurtoepassing	middle-temperature application	a aplicación a media temperatura	η εφαρμογή σε μέση θερμοκρασία
	Keskilämpötilan sovellus	Sittemperatuurtoepassing	среднотемпературное приложение	założenie w średniej temperaturze	-
	Low-temperature application	Nedertemperatuurtoepassing	Гарантиция а basse температура	a aplicación a bassa temperatura	la aplicación de baja temperatura
4	laagem-temperatuurtoepassing	laagem-temperatuurtoepassing	la température d'application	a aplicación a baixa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
	maailmalämpötilan sovellus	maailmalämpötilan sovellus	низоотемпературно приложение	założenie w niskiej temperaturze	-
5	de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	de seizoenafhankelijke energie-efficiëntieklasse voor ruimteverwarming	la classe d'efficacité énergétique saisonnière pour le chauffage des locaux	A classe de eficiência energética do aquecimento ambiente sazonal	η τάξη ενεργειακής απόδοσης της εποχικής θέρμανσης χώρου
	Ilmailmuuttuessa kaudittainen energiatehokkuusluokka	Ilmailmuuttuessa kaudittainen energiatehokkuusluokka	Класс сезонной эффективности энергетической организации пространства	Klassa sezonowej efektywności energetycznej organizowania przestrzeni	-
	Water heating energy efficiency class	Water heating energy efficiency class	la classe d'efficacité énergétique pour le chauffage de l'eau	A classe de eficiência energética do aquecimento de água	la classe de eficiência energética del caldeo de agua
6	de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	la classe d'efficacité énergétique pour le chauffage de l'eau	A classe de eficiência energética do aquecimento de água	η τάξη ενεργειακής απόδοσης θέρμανσης χώρου
	vedenlämmityksen energiatehokkuusluokka	vedenlämmityksen energiatehokkuusluokka	Класс энергоэффективности системы отопления	Klassa energiatehokkuuden energiatehokkuusluokka	-
	Rated heat output under average climate conditions	Rated heat output under average climate conditions	den nominelle värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza nominale (in condizioni climatiche medie)	la potencia nominal (en condiciones climáticas medias)
7	de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	Den nominelle värmeeffekt (under genomsnittliga klimatförhållanden)	la potenza nominale (in condizioni climatiche medie)	η ονομαστική θερμική ισχύς (στη μέση κλιματική συνθήκη)
	Ilmailmuuttuessa kaudittainen lämmönsäätövoima	Ilmailmuuttuessa kaudittainen lämmönsäätövoima	Январь и июль	per il riscaldamento dell'acqua. Il consumo annuo di energia (in condizioni climatiche medie)	para calefacción estacional de calefacción en condiciones climáticas medias
8	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	pro utpłyn – roczny zużycie energii za grzewczych warunkach klimatycznych	Para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)	για η θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας (στη μέση κλιματική συνθήκη)
	Ilmailmuuttuessa vuotuinen energiankulutus(klimaatitilassa)	Ilmailmuuttuessa vuotuinen energiankulutus(klimaatitilassa)	за отопление, годичного потребления на энергию (при средних климатичнiх условиях)	w opheffening van de omgevingstemperatuur	-
	For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	for die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia (in condizioni climatiche medie)	para calefatar agua, el consumo anual de electricidad en condiciones climáticas medias
9	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	pro utpłyn – roczny zużycie energii za grzewczych warunkach klimatycznych	para o aquecimento de água, o consumo anual de energia (em condições climáticas médias)	για την θέρμανση χώρου, η ετήσια κατανάλωση ηλεκτρικής ενέργειας (στη μέση κλιματική συνθήκη)
	vedenlämmityksessä vuotuinen sähkökulutus(keskilämpötilassa)	vedenlämmityksessä vuotuinen sähkökulutus(keskilämpötilassa)	за подогрев на вода, годичного потребления энергии за отопительных условиях	per il riscaldamento dell'acqua. Il consumo annuo di energia (in condizioni climatiche medie)	για την θέρμανση χώρου, η ετήσια κατανάλωση ηλεκτρικής ενέργειας (στη μέση κλιματική συνθήκη)
	Seasonal space heating energy efficiency under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	la eficiencia energética estacional de calefacción en condiciones climáticas medias	η ενεργειακή απόδοση εποχιακή θέρμανσης χώρου (στη μέση κλιματική συνθήκη)
10	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen	la eficiencia energética estacional de calefacción en condiciones climáticas medias	η ενεργειακή απόδοση εποχιακή θέρμανσης χώρου (στη μέση κλιματική συνθήκη)
	Ilmailmuuttuessa kaudittainen energiatehokkuus(keskilämpötilassa)	Ilmailmuuttuessa kaudittainen energiatehokkuus(keskilämpötilassa)	сезонная энергетическая эффективность при отоплении (при средних климатичнiх условиях)	la eficiencia energética estacional de calefacción en condiciones climáticas medias	η ενεργειακή απόδοση εποχιακή θέρμανσης χώρου (στη μέση κλιματική συνθήκη)
11	Water heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	la eficiencia energética para el caldeo (en las condiciones climáticas medias)	la eficiencia energética para el caldeo (en las condiciones climáticas medias)	η ενεργειακή απόδοση θέρμανσης χώρου (στη μέση κλιματική συνθήκη)
	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	Энергетическая эффективность при нагревании (в условиях среднего климата)	la eficiencia energética do aquecimento de água (em condições climáticas médias)	η ενεργειακή απόδοση θέρμανσης χώρου (στη μέση κλιματική συνθήκη)
	Sound power level L <sub>WA</sub> , indoor	Sound power level L <sub>WA</sub> , indoor	der Schalleistungspegel L <sub>WA</sub> in Gebäuden	Il livello di potenza sonora L <sub>WA</sub> all'interno	el nivel de potencia acústica L <sub>WA</sub> en interiores
12	het geluidstermopotentiaal L <sub>WA</sub> binnen	het geluidstermopotentiaal L <sub>WA</sub> binnen	Уровне́нства́ мощности L <sub>WA</sub> в помещении	Il livello di potenza sonora L <sub>WA</sub> in ambienti	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
	ääniteho L <sub>WA</sub> sisällä	ääniteho L <sub>WA</sub> sisällä	ниво на звукова мощност L <sub>WA</sub> на закрито	potenza sonora all'interno L <sub>WA</sub> in riscaldamento	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
	Werk en uitsluitend in de daluren	Werk en uitsluitend in de daluren	dass ein ausschließlicher Betrieb des Kompressoragates zu Schwachlastzeiten	funciona soltanto durante le ore notturne	η λειτουργία αποκλειστικά κατά τη διάρκεια της νύχτας
13	toiminta vain ainoastaan kuluksittain ulkopuolella	toiminta vain ainoastaan kuluksittain ulkopuolella	dasss ausschließlich unter der Last bei geringer Leistung	работает только в часы пиковой нагрузки	la potenza elettrica nominale in condizioni climatiche medie
	Rated heat output under colder climate conditions	Rated heat output under colder climate conditions	die Wärmemengeleistung bei kaltem Klimaverhältnissen	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
14	de nominale warmteafgifte, onder kouder klimaatomstandigheden	de nominale warmteafgifte, onder kouder klimaatomstandigheden	Nominell abgegebene Wärmeeffekt unter kaltem Klimaverhältnissen	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
	Ilmailmuuttuessa kymmeniä lämpöastetta	Ilmailmuuttuessa kymmeniä lämpöastetta	Normaalit lämpötilat kymmeniä lämpöastetta	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
	Rated heat output under warmer climate conditions	Rated heat output under warmer climate conditions	die Wärmemengeleistung bei warmem Klimaverhältnissen	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
15	de nominale warmteafgifte, onder warmer klimaatomstandigheden	de nominale warmteafgifte, onder warmer klimaatomstandigheden	Normaal abgegebene Wärmeeffekt unter warmem Klimaverhältnissen	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
	Ilmailmuuttuessa lämpöastetta	Ilmailmuuttuessa lämpöastetta	Ilmavirta kuumalla lämpötilalla	la potenza elettrica nominale in condizioni climatiche medie	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου
16	voor ruimteverwarming, het jaarlijkse energieverbruik onder kouder klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder kouder klimaatomstandigheden	For pumpspraying, äng energiförbrukning under kallare klimatförhållanden	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più fredde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más frías
	Ilmailmuuttuessa vuotuinen energiankulutus kylmissä lämpöolosuhteissa	Ilmailmuuttuessa vuotuinen energiankulutus kylmissä lämpöolosuhteissa	pro utpłyn – roczny zużycie energii za chłodnych warunkach klimatycznych	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più fredde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más frías
	For space heating, annual energy consumption under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
17	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmer klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder warmer klimaatomstandigheden	For pumpspraying, äng energiförbrukning under varmare klimatförhållanden	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Ilmailmuuttuessa vuotuinen energiankulutus lämpimässä lämpöolosuhteissa	Ilmailmuuttuessa vuotuinen energiankulutus lämpimässä lämpöolosuhteissa	pro utpłyn – roczny zużycie energii za cieplejszych warunkach klimatycznych	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	For water heating, annual energy consumption under colder climate conditions	For water heating, annual energy consumption under colder climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei kaltem Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
18	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder kouder klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder kouder klimaatomstandigheden	For water heating, annual electricity consumption under warmer climate conditions	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	vedenlämmityksessä vuotuinen sähkökulutus kylmissä lämpöolosuhteissa	vedenlämmityksessä vuotuinen sähkökulutus kylmissä lämpöolosuhteissa	pro utpłyn – roczny zużycie energii za chłodnych warunkach klimatycznych	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	For water heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
19	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmer klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmer klimaatomstandigheden	For water heating, annual electricity consumption under warmer climate conditions	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	vedenlämmityksessä vuotuinen sähkökulutus lämpimässä lämpöolosuhteissa	vedenlämmityksessä vuotuinen sähkökulutus lämpimässä lämpöolosuhteissa	pro utpłyn – roczny zużycie energii za cieplejszych warunkach klimatycznych	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Seasonal space heating energy efficiency under colder climate conditions	Seasonal space heating energy efficiency under colder climate conditions	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei kaltem Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
20	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder kouder klimaatomstandigheden	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder kouder klimaatomstandigheden	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei kaltem Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Ilmailmuuttuessa kaudittainen energiatehokkuus kylmissä lämpöolosuhteissa	Ilmailmuuttuessa kaudittainen energiatehokkuus kylmissä lämpöolosuhteissa	сезонная энергетическая эффективность при отоплении (при холодных климатичнiх условиях)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Seasonal space heating energy efficiency under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
21	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder warmer klimaatomstandigheden	de seizoenafhankelijke energie-efficiëntie voor ruimteverwarming onder warmer klimaatomstandigheden	die Jahresbeheizungs-Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Ilmailmuuttuessa kaudittainen energiatehokkuus lämpimässä lämpöolosuhteissa	Ilmailmuuttuessa kaudittainen energiatehokkuus lämpimässä lämpöolosuhteissa	сезонная энергетическая эффективность при отоплении (при теплых климатичнiх условиях)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Water heating energy efficiency under colder climate conditions	Water heating energy efficiency under colder climate conditions	la eficiencia energética para el caldeo (en las condiciones climáticas más frías)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condizioni climatiche più calde	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
22	de energie-efficiëntie voor waterverwarming onder kouder klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder kouder klimaatomstandigheden	la eficiencia energética para el caldeo (en las condiciones climáticas más frías)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condiciones climáticas más cálidas	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	vedenlämmityksen energiatehokkuus kylmissä lämpöolosuhteissa	vedenlämmityksen energiatehokkuus kylmissä lämpöolosuhteissa	Энергетическая эффективность при нагревании (в условиях холодного климата)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condiciones climáticas más cálidas	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Water heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	la eficiencia energética para el caldeo (en las condiciones climáticas más cálidas)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condiciones climáticas más cálidas	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
23	de energie-efficiëntie voor waterverwarming onder warmer klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder warmer klimaatomstandigheden	la eficiencia energética para el caldeo (en las condiciones climáticas más cálidas)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condiciones climáticas más cálidas	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	vedenlämmityksen energiatehokkuus kylmissä lämpöolosuhteissa	vedenlämmityksen energiatehokkuus kylmissä lämpöolosuhteissa	Энергетическая эффективность при нагревании (в условиях холодного климата)	per il riscaldamento dell'acqua. Il consumo annuo di energia, in condiciones climáticas más cálidas	para calefatar agua, el consumo anual de electricidad en condiciones climáticas más cálidas
	Sound power level L <sub>WA</sub> , outdoor	Sound power level L <sub>WA</sub> , outdoor	der Schalleistungspegel L <sub>WA</sub> im Freien	Il livello di potenza sonora L <sub>WA</sub> all'esterno	el nivel de potencia acústica L <sub>WA</sub> en exteriores
24	het geluidstermopotentiaal L <sub>WA</sub> buiten	het geluidstermopotentiaal L <sub>WA</sub> buiten	Уровне́нства́ мощности L <sub>WA</sub> на открытом	Il livello di potenza sonora L <sub>WA</sub> all'esterno	η ονομαστική θερμική ισχύς, στο χώρο θέρμανσης χώρου

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	133	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.21	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.60	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.35	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.21	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.60	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3170	m <sup>3</sup> /h
Capacity control	variable						
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5905	kWh				

For heat pump combination heater:				Water heating energy efficiency	$\eta_{wh}$	148	%
Declared load profile	L						
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	189	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.31	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.56	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	9.20	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	8.9	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.32	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.60	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	4145	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	148	%	
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.2	kW	Seasonal space heating energy efficiency	$\eta_s$	121	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	5.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.86	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.69	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.92	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.52	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.21	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	9.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	6990	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	118	%	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	917	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.9	kW	Seasonal space heating energy efficiency	$\eta_s$	165	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	4.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.8	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.73	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.71	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.46	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	9.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.52	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.4	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	2.52	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	3.31	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	9.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5528	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	$\eta_{wh}$	118	%
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	917	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	150	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.09	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.64	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.81	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.53	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3401	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	161	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kWh				
Annual electricity consumption	AEC	674	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.



Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	EHPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	213	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	-	kW	Tj = - 7 °C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-				
Tj = + 2 °C	Pdh	10.0	kW	Tj = + 2 °C	COPd	3.30	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	6.4	kW	Tj = + 7 °C	COPd	4.73	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	4.7	kW	Tj = +12 °C	COPd	7.12	-
Degradation co-efficient (**)	Cdh	0.97	-				
Tj = bivalent temperature	Pdh	10.0	kW	Tj = bivalent temperature	COPd	3.30	-
Tj = operation limit temperature	Pdh	8.7	kW	Tj = operation limit temperature	COPd	1.53	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)
Annual energy consumption	Q <sub>HE</sub>	2394	kWh
Rated air flow rate, outdoors		3170	m <sup>3</sup> /h

For heat pump combination heater:			
Declared load profile		L	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kWh
Annual electricity consumption	AEC	674	kWh
Water heating energy efficiency	$\eta_{wh}$	161	%

#### Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	136	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.21	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	5.2	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.60	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.35	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.21	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.60	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5905	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	148	%	
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	195	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	3.31	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.7	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.56	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.9	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	6.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	9.20	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	8.9	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.32	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.60	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	1.1	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	4145	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	148	%	
Daily electricity consumption	Q <sub>elec</sub>	3.300	kW/h				
Annual electricity consumption	AEC	736	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.2	kW	Seasonal space heating energy efficiency	$\eta_s$	124	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	5.8	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	2.86	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.4	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.58	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	3.8	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.69	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.6	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	6.67	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	7.5	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.92	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	7.5	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.52	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	2.21	-
Bivalent temperature	T <sub>biv</sub>	-15	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	9.2	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	6990	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	118	%	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	917	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.9	kW	Seasonal space heating energy efficiency	$\eta_s$	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	6.5	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	4.25	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	5.8	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	4.73	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	4.0	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	5.71	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.46	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	9.4	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	2.52	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	9.4	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	2.52	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	8.8	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	3.31	-
Bivalent temperature	T <sub>biv</sub>	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	9.9	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	5528	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	118	%	
Daily electricity consumption	Q <sub>elec</sub>	4.200	kW/h				
Annual electricity consumption	AEC	917	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	154	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	1.81	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	3.09	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.4	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	5.64	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	1.81	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.53	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	3401	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	161	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	674	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUZ-WM112YAA(-BS)
	Indoor unit:	ERPT20X-**D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.0	kW	Seasonal space heating energy efficiency	$\eta_s$	220	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T <sub>j</sub>			
T <sub>j</sub> = - 7 °C	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 7 °C	COP <sub>d</sub>	-	-
Degradation co-efficient (**)	C <sub>dh</sub>	-	-				
T <sub>j</sub> = + 2 °C	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = + 2 °C	COP <sub>d</sub>	3.30	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.99	-				
T <sub>j</sub> = + 7 °C	P <sub>dh</sub>	6.4	kW	T <sub>j</sub> = + 7 °C	COP <sub>d</sub>	4.73	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.98	-				
T <sub>j</sub> = +12 °C	P <sub>dh</sub>	4.7	kW	T <sub>j</sub> = +12 °C	COP <sub>d</sub>	7.12	-
Degradation co-efficient (**)	C <sub>dh</sub>	0.97	-				
T <sub>j</sub> = bivalent temperature	P <sub>dh</sub>	10.0	kW	T <sub>j</sub> = bivalent temperature	COP <sub>d</sub>	3.30	-
T <sub>j</sub> = operation limit temperature	P <sub>dh</sub>	8.7	kW	T <sub>j</sub> = operation limit temperature	COP <sub>d</sub>	1.53	-
T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	P <sub>dh</sub>	-	kW	T <sub>j</sub> = - 15 °C (if TOL < - 20 °C)	COP <sub>d</sub>	-	-
Bivalent temperature	T <sub>biv</sub>	2	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P <sub>OFF</sub>	0.022	kW	Rated heat output (*)	P <sub>sup</sub>	0.0	kW
Thermostat-off mode	P <sub>TO</sub>	0.022	kW				
Standby mode	P <sub>SB</sub>	0.022	kW	Type of energy input	Electrical		
Crankcase heater mode	P <sub>CK</sub>	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	3170	m <sup>3</sup> /h	
Sound power level, indoors/outdoors	L <sub>WA</sub>	40/60	dB(A)				
Annual energy consumption	Q <sub>HE</sub>	2394	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	L			$\eta_{wh}$	161	%	
Daily electricity consumption	Q <sub>elec</sub>	3.100	kW/h				
Annual electricity consumption	AEC	674	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(\*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(\*\*) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.